


Short trigger & system same GND

Reverse input protection

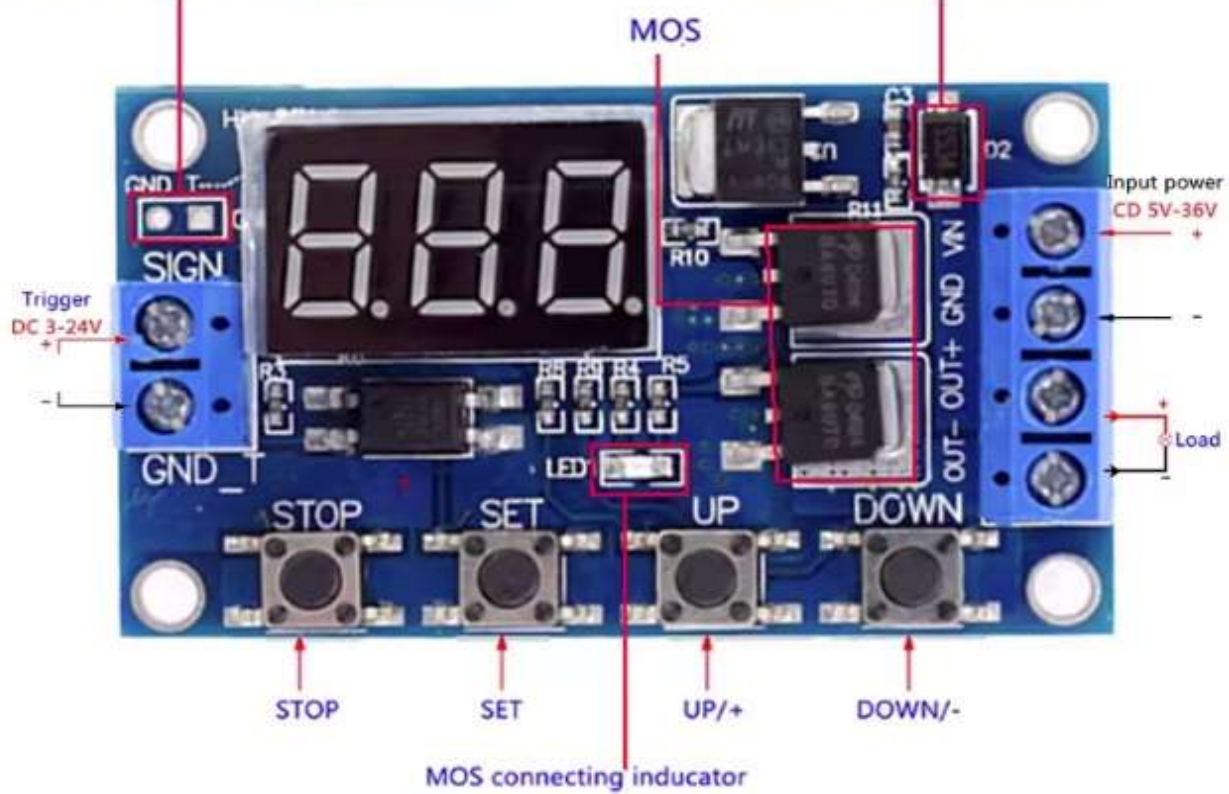

P1:delay off

P2:delay on-off

P3:cycle on-off

P4:Signal holding relay on function